

1、主要参数 Main Characteristics


2、用途 Applications

- 高频开关电源 High frequency switching mode power supply
- 电子镇流器 Electronic ballast
- UPS 电源 Uninterruptible Power Supply
- PFC 功率因数校正 Power Factor Correction
- 大功率开关电源 High power switching power supply
- 电焊机控制 Control of electric welding machine

3、产品特性 Features

- 低栅极电荷 Low gate charge
- 低 C_{rss} (典型值 300pF) Low C_{rss} (typical 300pF)
- 开关速度快 Fast switching speed
- 产品全部经过雪崩测试 100% avalanche tested
- 高抗 dv/dt 能力 Improved dv/dt capability
- RoHS 产品 RoHS product

V_{DSS}	60	V
I_D	50	A
P_D	90	W
$R_{DS(ON)TYP}$	14.5	m Ω

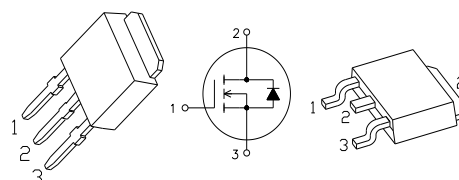

TO-251S

TO-252

1 栅极(G) 2 漏极 (D) 3 源极(S)

4. 电特性 Electrical Characteristics

4.1 极限值 Absolute Ratings ($T_C = 25^\circ\text{C}$)

参数名称 Parameter	符号 Symbol	额定值 Value	单位 Unit
漏极-源极电压 Drain-Source Voltage	V_{DSS}	60	V
连续漏极电流 Drain Current -continuous	I_D	$T_C = 25^\circ\text{C}$ 50 $T_C = 100^\circ\text{C}$ 8	A
最大脉冲漏极电流 (注 1) Drain Current - pulse (note 1)	I_{DM}	200	A
栅源电压 Gate-Source Voltage	V_{GS}	± 20	V
单脉冲雪崩能量 (注 2) Single Pulsed Avalanche Energy (note 2)	E_{AS}	320	mJ
二极管反向恢复最大电压变化速率 (注 3) Peak Diode Recovery dv/dt (note 3)	dv/dt	3.0	V/ns
耗散功率 Power Dissipation	P_D	80	W
结温, 贮存温度 Operating and Storage Temperature Range	T_j, T_{stg}	150, $-55 \sim 150$	$^\circ\text{C}$

4.2 电参数 Electrical Characteristics (T_c = 25℃)

参 数 名 称 Parameter	符 号 Symbol	测 试 条 件 Tests conditions	最小 Min	典型 Typ	最大 Max	单位 Units
截止特性 Off –Characteristics						
漏源击穿电压 Drain-Source Voltage	BV _{DSS}	V _{GS} =0V, I _D =250μA	60			V
漏源击穿电压温度系数 Breakdown Voltage Temperature Coefficient	Δ BV _{DSS} / Δ T _J	I _D = 250 μA		0.71		V/°C
漏源漏电流 Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =60V, V _{GS} =0 , 25℃			1	μ A
		V _{DS} =48V,V _{GS} =0 , 125℃			100	
栅源漏电流 Gate-body leakage current	I _{GSS}	V _{GS} = ± 20V			± 100	nA
导通特性 On-Characteristics						
静态导通电阻 Static Drain-Source On-Resistance	R _{DSON} *	V _{GS} =10V, I _D =19A		14.5	20	mΩ
阈值电压 Gate Threshold Voltage	V _{GS (TH)}	V _{DS} =V _{GS} , I _D =250μA	1		2	V
跨导 Forward Transconductance	g _{fs}	V _{DS} =15V, I _D =25A		15		S
脉冲宽度 tp≤380μs,占空比 δ≤2%						
动态特性 Dynamic Characteristics						
输入电容 Input capacitance	C _{iss}	V _{GS} =0V, V _{DS} =25V f=1.0MH		4100		pF
输出电容 Output capacitance	C _{oss}			2900		
反向传输电容 Reverse transfer capacitance	C _{rss}			300		
开关特性 Switching Characteristics						
开启延迟(时间) Turn-On delay time	t _{d(ON)}	I _D =4.0A V _{DD} = 300V V _{GS} = 10V R _G = 4.7Ω		21		nS
上升时间 Turn-On rise time	t _r			27		
关断延迟(时间) Turn-Off delay time	t _{d(OFF)}			63		
下降时间 Turn-Off Fall time	t _f			30		
栅极电荷 Total Gate Charge	Qg	I _D =4A,V _{DD} =300V V _{GS} = 10V		58.3		nC
栅源电荷 Gate-Source charge	Qgs			12.6		
栅漏电荷 Gate-Drain charge	Qgd			13		

源-漏二极管特性 Drain-Source Diode Characteristics						
源漏二极管连续电流 Maximum Continuous Drain-Source Diode Forward Current	I_{SD}	$T_c = 25^\circ\text{C}$			50	A
源漏二极管脉冲电流 Maximum Pulsed Drain-Source Diode Forward Current	I_{SDM}				200	A
源漏二极管正向压降 Drain-Source Diode Forward Voltage	V_{FSD}	$I_{SD}=19\text{A}, V_{GS}=0$			1.5	V
反向恢复时间 Reverse recovery time	t_{rr}	$I_{SD}=19\text{A}, T_j = 25^\circ\text{C}$ $dI_F/dt=100\text{A}/\mu\text{s}, V_{GS}=0\text{V}$		42	45	nS
反向恢复电荷 Reverse recovery charge	Q_{rr}			85	91	nC

参数名称 Parameter	符号 Symbol	额定值 Value	单位 Unit
热阻（结到壳） Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.39	$^\circ\text{C}/\text{W}$
热阻（结到环境） Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	$^\circ\text{C}/\text{W}$

注：

- 1 重复脉冲，宽度由最高结温限制
- 2 $L=10\text{mH}$, $I_D=8\text{A}$, 起始结温 $T_J=25^\circ\text{C}$
- 3 $I_{SD}=50\text{A}$, $dI/dt \leq 100\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DS}$,
起始结温 $T_J=25^\circ\text{C}$

Notes:

- 1 Pulse width limited by maximum junction temperature
- 2 $L=10\text{mH}$, $I_D=8\text{A}$, Starting $T_J=25^\circ\text{C}$
- 3 $I_{SD}=50\text{A}$, $dI/dt \leq 100\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DS}$,
Starting $T_J=25^\circ\text{C}$

5. 特性曲线 Characteristics Curve

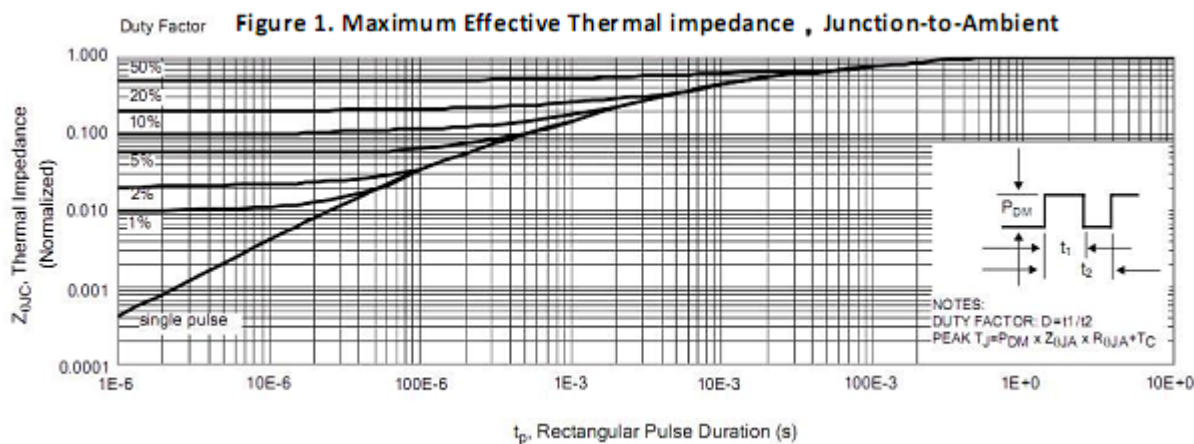


Figure 2, Maximum Power Dissipation vs Case Temperature

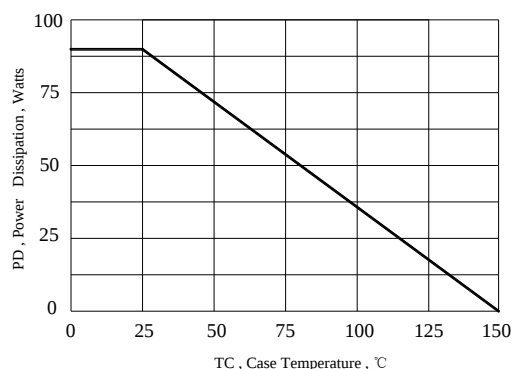


Figure3. Maximum Continuous Drain Current vs Case Temperature

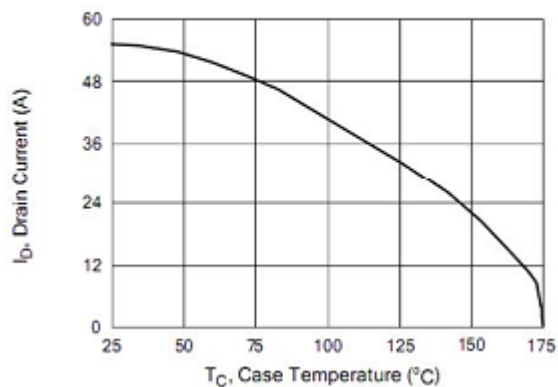


Figure 4. Typical Output Characteristics

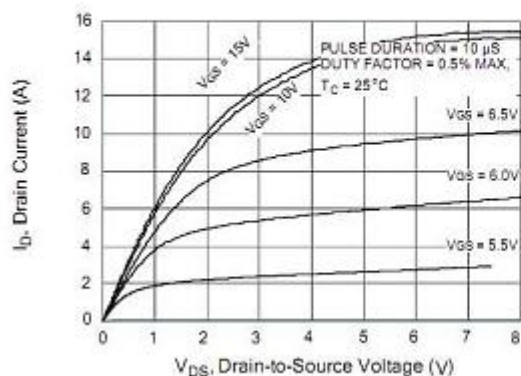


Figure5. Typical Drain-to-Source ON Resistance vs Gate Voltage and Drain Current

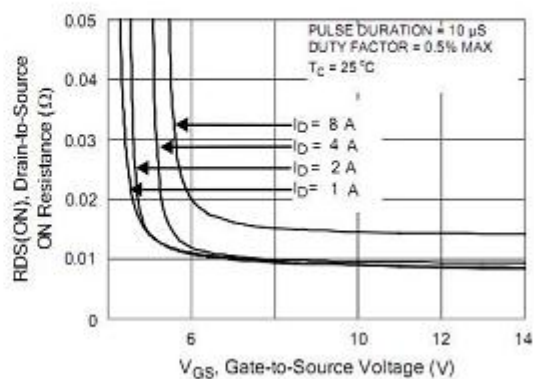


Figure 6. Maximum Peak Current Capability

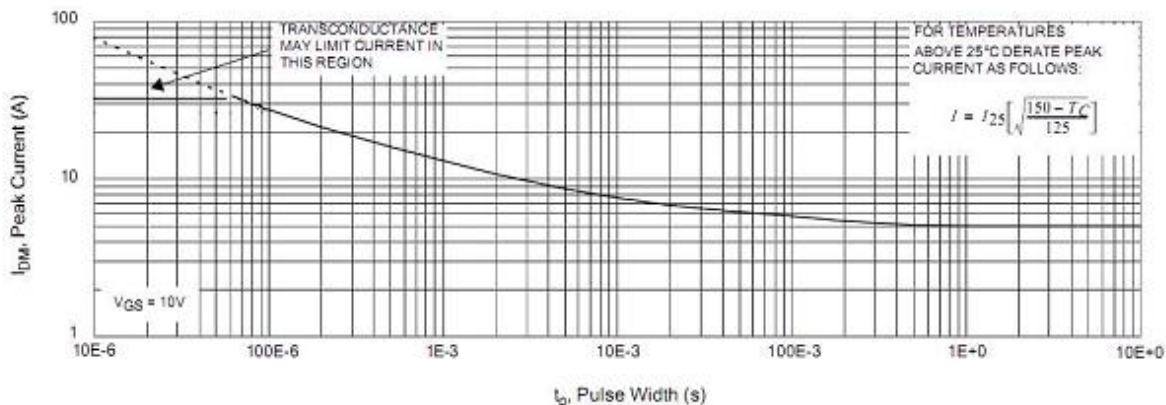


Figure 7. Typical Transfer Characteristics

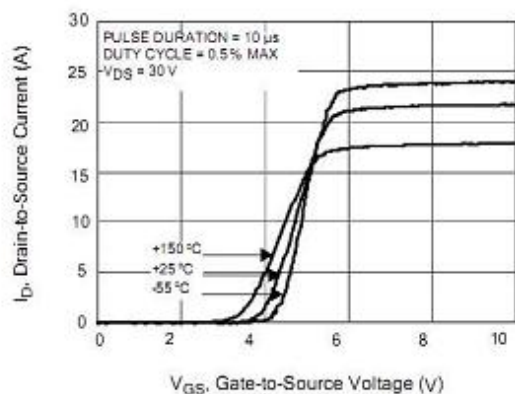


Figure 8. Unclamped Inductive Switching Capability

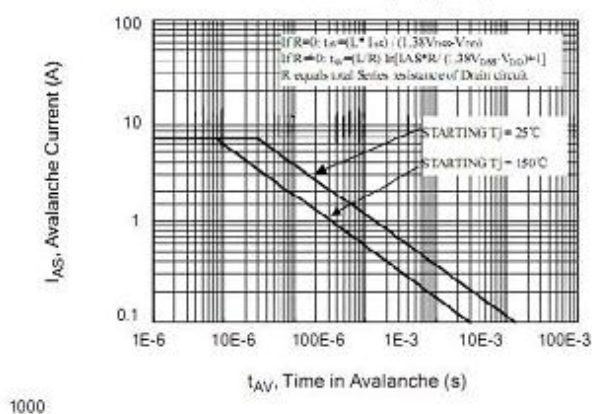


Figure 9. Typical Drain-to-Source ON Resistance vs Drain Current

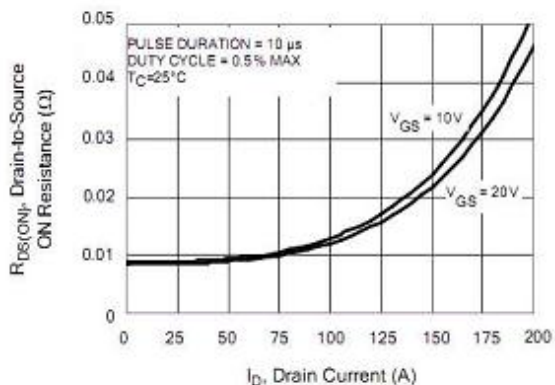


Figure 10. Typical Drain-to-Source ON Resistance vs Junction Temperature

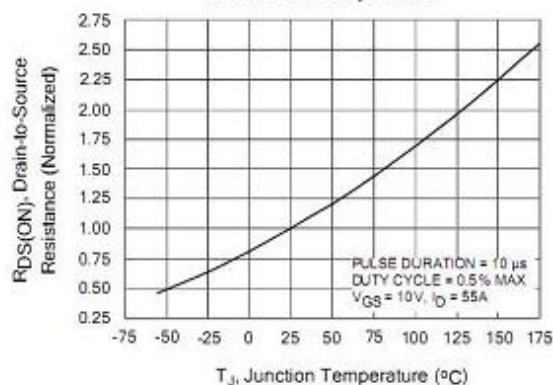


Figure 11. Typical Breakdown Voltage vs Junction Temperature

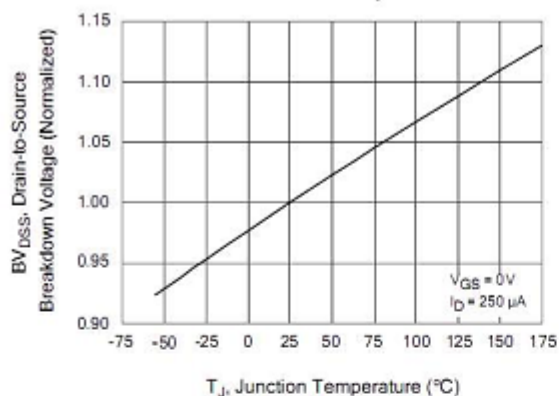


Figure 12. Typical Threshold Voltage vs Junction Temperature

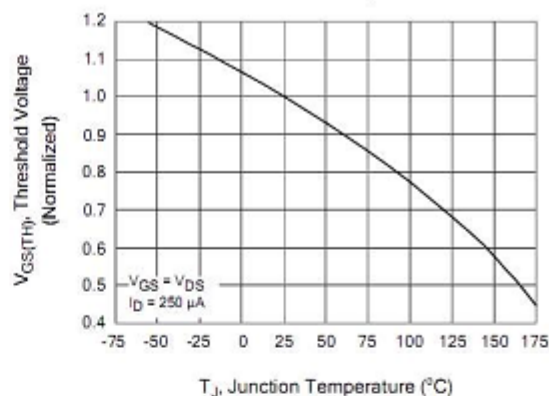


Figure 13. Maximum Forward Bias Safe Operating Area

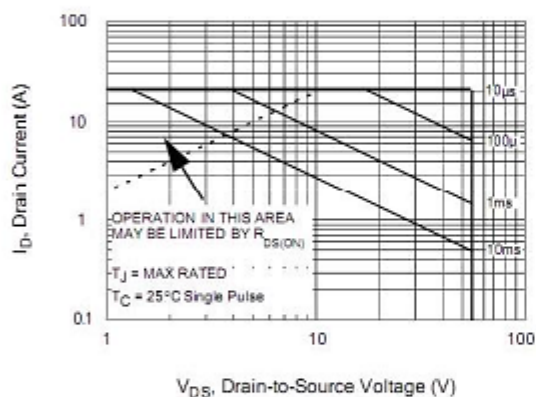


Figure 14. Typical Capacitance vs Drain-to-Source Voltage

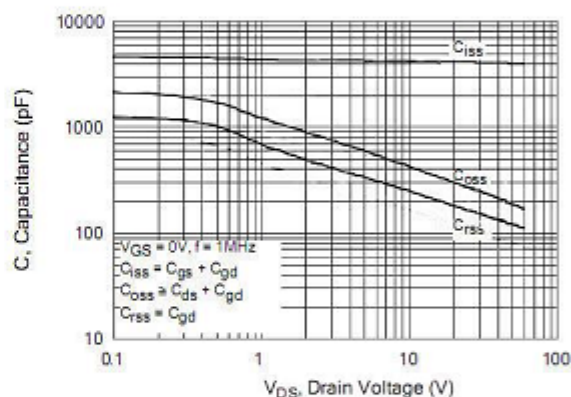


Figure 15. Typical Gate Charge vs Gate-to-Source Voltage


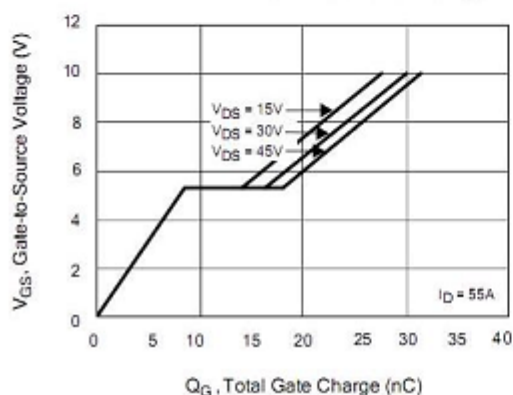


Figure 16. Typical Body Diode Transfer Characteristics

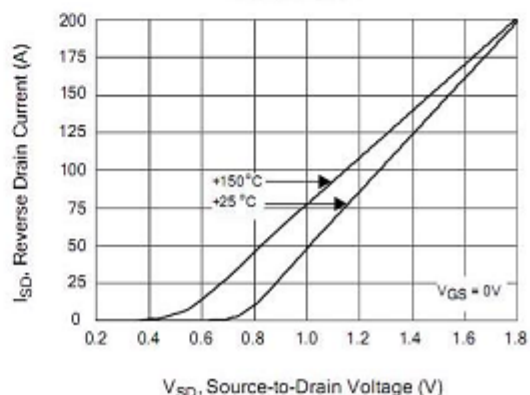

Test Circuit and Waveform

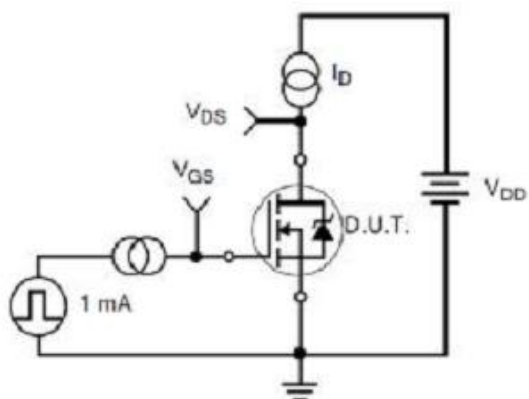


Figure 17. Gate Charge Test Circuit

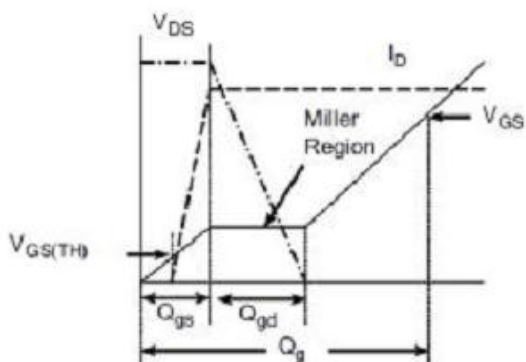


Figure 18. Gate Charge Waveform

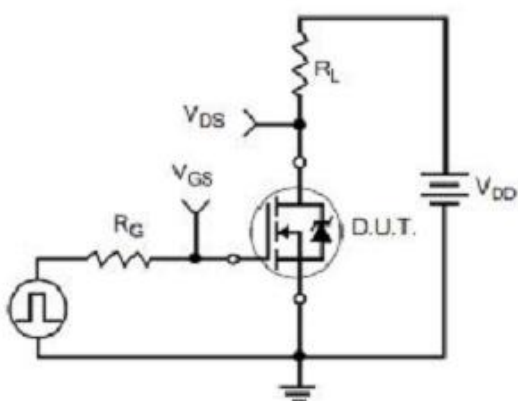


Figure 19. Resistive Switching Test Circuit

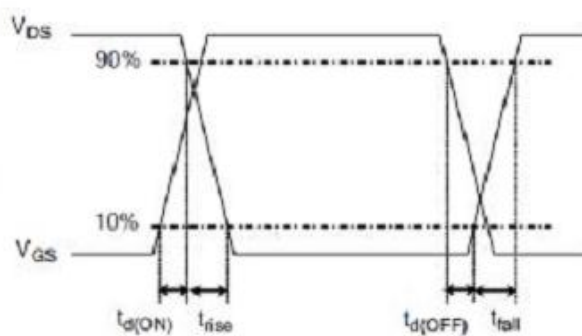


Figure 20. Resistive Switching Waveforms

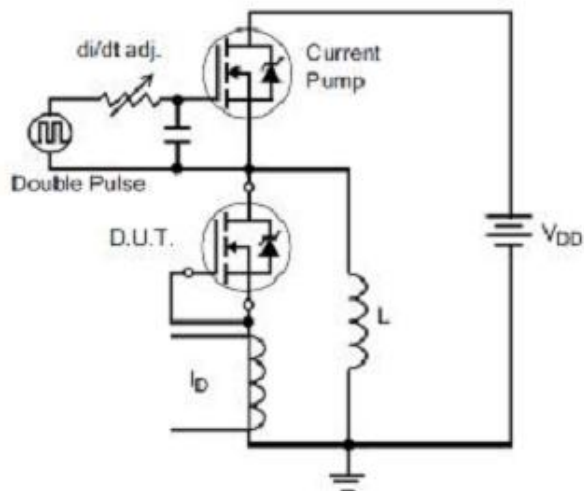


Figure 21. Diode Reverse Recovery Test Circuit

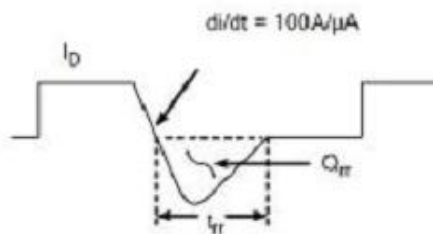


Figure 22. Diode Reverse Recovery Waveform

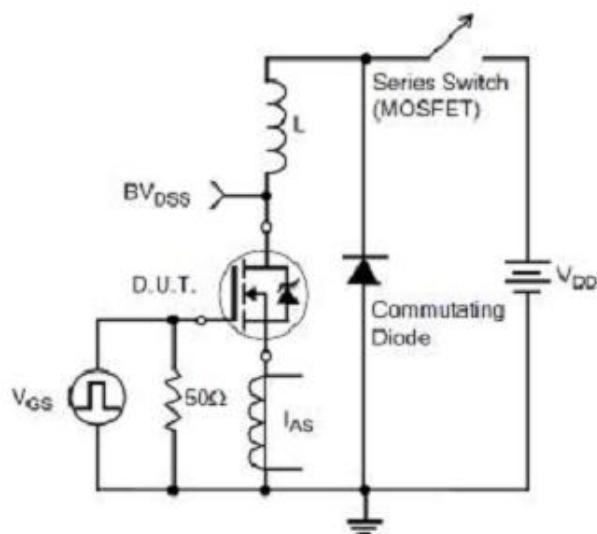


Figure 23. Unclamped Inductive Switching Test Circuit


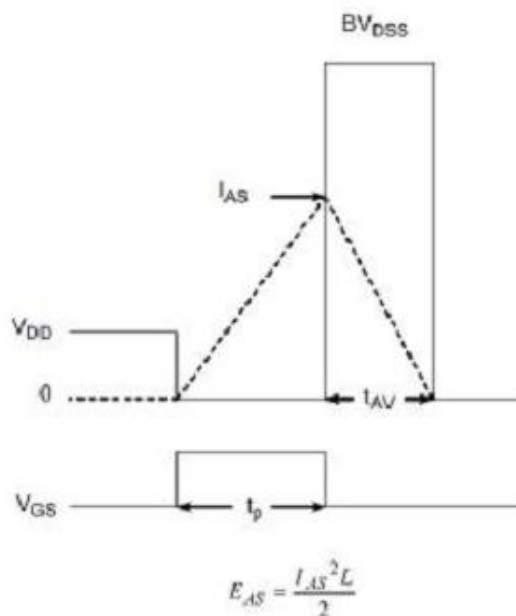



Figure 24. Unclamped Inductive Switching Waveforms

6. Marking (印章说明)

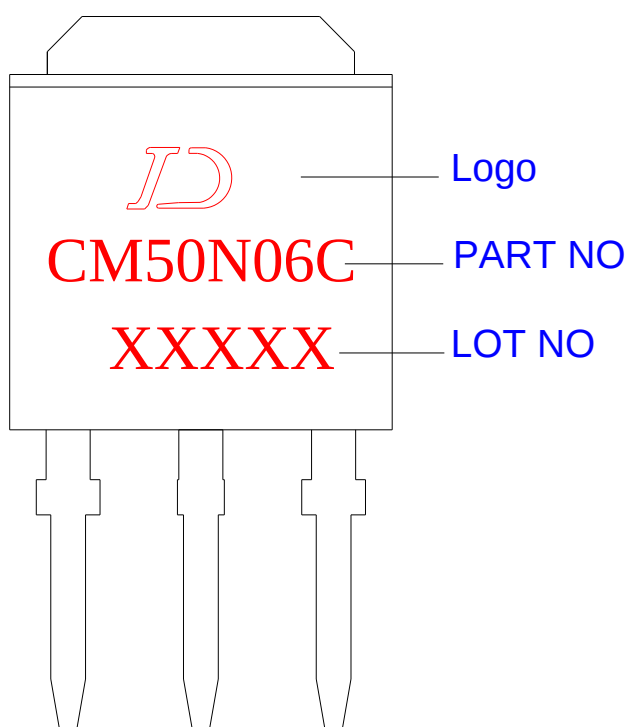


7. 产品外形尺寸图(单位: mm) Package Dimentions(Unit: mm)

T0-251S

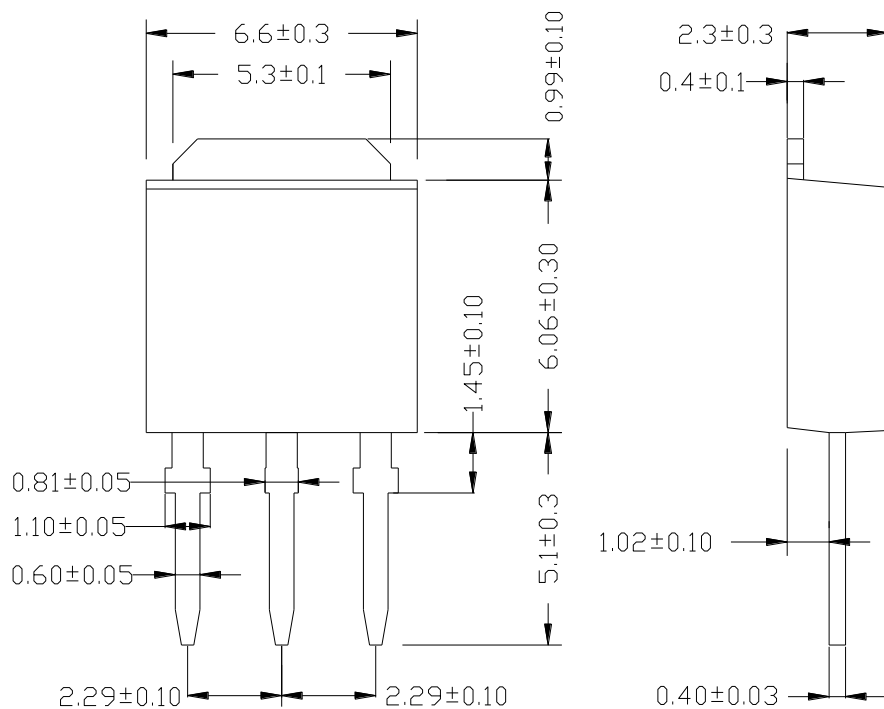

T0-252

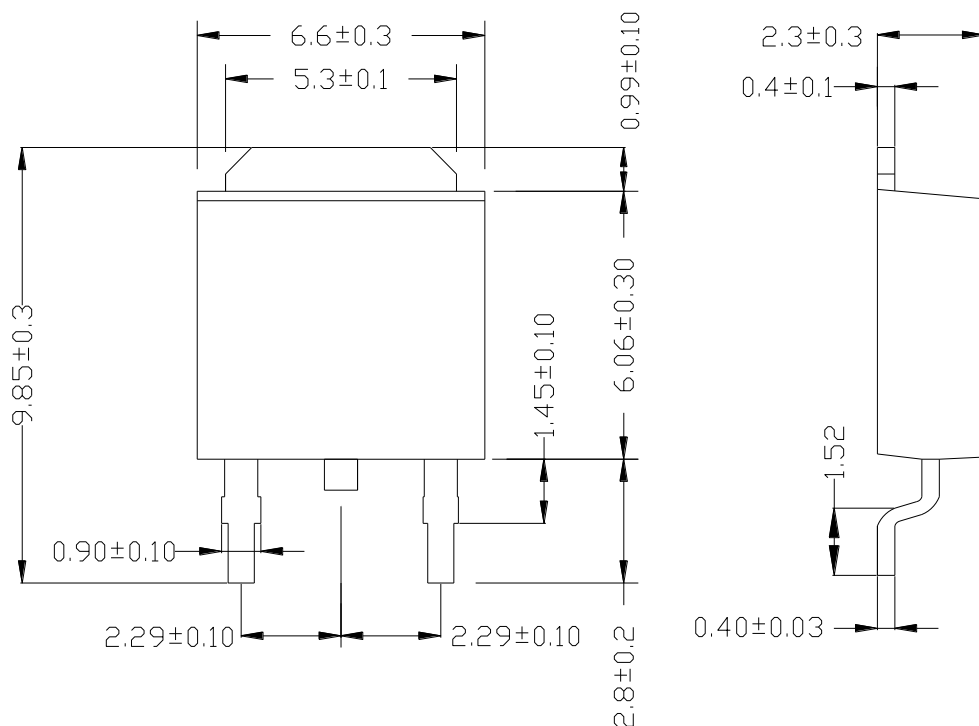

The name and content of poisonous and harmful material in products

Part's Name	Hazardous Substance					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
Limit	≤0.1%	≤0.1%	≤0.01%	≤0.1%	≤0.1%	≤0.1%
Lead Frame	○	○	○	○	○	○
Molding Compound	○	○	○	○	○	○
Chip	○	○	○	○	○	○
Wire Bonding	○	○	○	○	○	○
Solder	×	○	○	○	○	○
Note	○: means the hazardous material is under the criterion of SJ/T11363-2006. ×: means the hazardous material exceeds the criterion of SJ/T11363-2006. The plumbum element of solder exist in products presently, but within the allowed range of Eurogroup's RoHS.					

Warnings

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. It is suggested to be used under 80 percent of the maximum ratings of the device.
2. When installing the heatsink, please pay attention to the torsional moment and the smoothness of the heatsink.
3. VDMOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. This publication is made by Jingdao Electronic and subject to regular change without notice.